

MOSAIC

M2



EN 1021

Sanitized
antibactérien

Martindale : 100 000
Bally Flexion : 150 000



M389



M314



M377



M360



M330



M371



M382



M318




M310



M359



M369

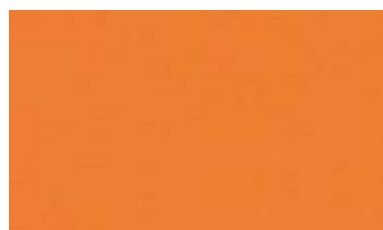

M320



M350



M340



M339

MOSAIC

CHARACTERISTICS	RESULTS	UNITS	METHODS
Total weigh	660+/-5%	g/m2	ISO 2286-2
Thickness	0.90-1.10	mm	ISO 2286-3
Coating composition	PVC - 87		
Textile composition	PES - 8		
	CO - 5		
Abrasion resistance (Martindale)	100000 - slight	Cycles	ISO 5470-2
Bally Flexion	150000	Cycles	ISO 5402
Burning behaviour	Pass		EN 1021-1+2
	1.IM		UNI 9175
	M2		NF P 92-507
			TEST REPORT Nr LFF 2018.105
Bacterial resistance	Sanitized ®		JIS Z 2801
Fungal resistance	Sanitized ®		ISO 846 A
Colour fastness to rubbing (Veslic)	4-5	Grey scale	DIN 54021 dry/wet - 50 cycles
Colour fastness to rubbing (Crockmeter)	4-5	Grey scale	ISO 105-X12 dry/wet - 20 cycles
Ethyl alcohol 96% vol. resistance	4-5	Grey scale	DIN 54021
Light fastness	>=6	Blue scale	ISO 105-B02



Laboratório de Fumo e Fogo

MAINTENANCE :

Cleaning - Rub gently with a sponge or cloth moistened in a soapy water solution. Do not use multi-purpose products.



M333



M391



M372



M301



M384